



# Erosion Control - Building

A guide to ABG surface erosion protection for building & landscaping applications



Viridor Energy Recovery Facility, Bicester  
Erosaweb for stormwater lagoon revetments

Erosion control is nothing to take lightly. In addition to posing a threat to the environment via sediment run-off that pollutes storm drains, nearby streams and other bodies of water, storm water-related erosion poses immediate health and safety concerns to construction site personnel and neighbouring premises.

Failure to observe erosion control methods can also be costly in terms of damage to adjacent and/or down-slope property owners, not to mention the fines associated with contravening legislation. In the UK for example, environmental fines of up to £3million can be imposed.

Some soils are more prone to erosion than others, but climate change is leading to more frequent and intense rainfall, so whatever the soil type, the risk of soil erosion is increasing. Erosion is typically a multi-phase process, starting at the surface via wind and rainfall impact erosion and then quickly making its way through deeper layers of the ground.

Either way, there is an easy solution in the form of erosion control systems. These range from low cost simple soil cover, through permanent surface reinforcement mats, to highly engineered slope stability webs. The benefit is not only soil protection, but also the ability to engineer steeper slopes and thus maximise the area of flat land available for development.

#### **Temporary erosion control**

Temporary erosion control will give immediate protection to the bare soil and continue until the natural vegetation is established. These are low cost biodegradable straw, jute or coir woven textiles or blankets that are pinned onto the soil surface. The mats absorb the rain impact and create a warm micro-climate to speed seed germination. The heavy coir mats are also able to protect soil from flowing water. The material gradually decays into soil nutrients as the vegetation cover progressively gets stronger. Sometimes the works themselves may be temporary and the erosion mat is used instead of vegetation.

#### **Permanent erosion control**


Permanent erosion control consists of mats and webs that provide immediate protection to bare soil and also continue for the lifetime of the project. They are manufactured from UV stabilised PP or HDPE polymer and are pinned onto the soil surface or tied onto a geogrid laid over lagoon linings. An advantage of permanent over temporary is that it continues to protect the soil if there is die-back of the vegetation.

Permanent erosion control mats provide long term reinforcement to the roots of the grass in the lining of waterways, flood relief channels, spillways, etc. As the vegetation establishes, the root structure intertwines with the erosion mat and the maximum water velocity/shear strength is dependent upon the fibre density and strength of the mat, the grass roots and the pinning.

Permanent erosion control webs retain soil on steep slopes or on geomembrane liners where the soil would otherwise be at risk of slipping. Revetments are also constructed with erosion control webs filled with crushed stone or low slump concrete.



University of Exeter, East Park student accommodation  
Erosaweb panels for topsoil containment and veneer stability above  
stone faced soil nail retaining wall

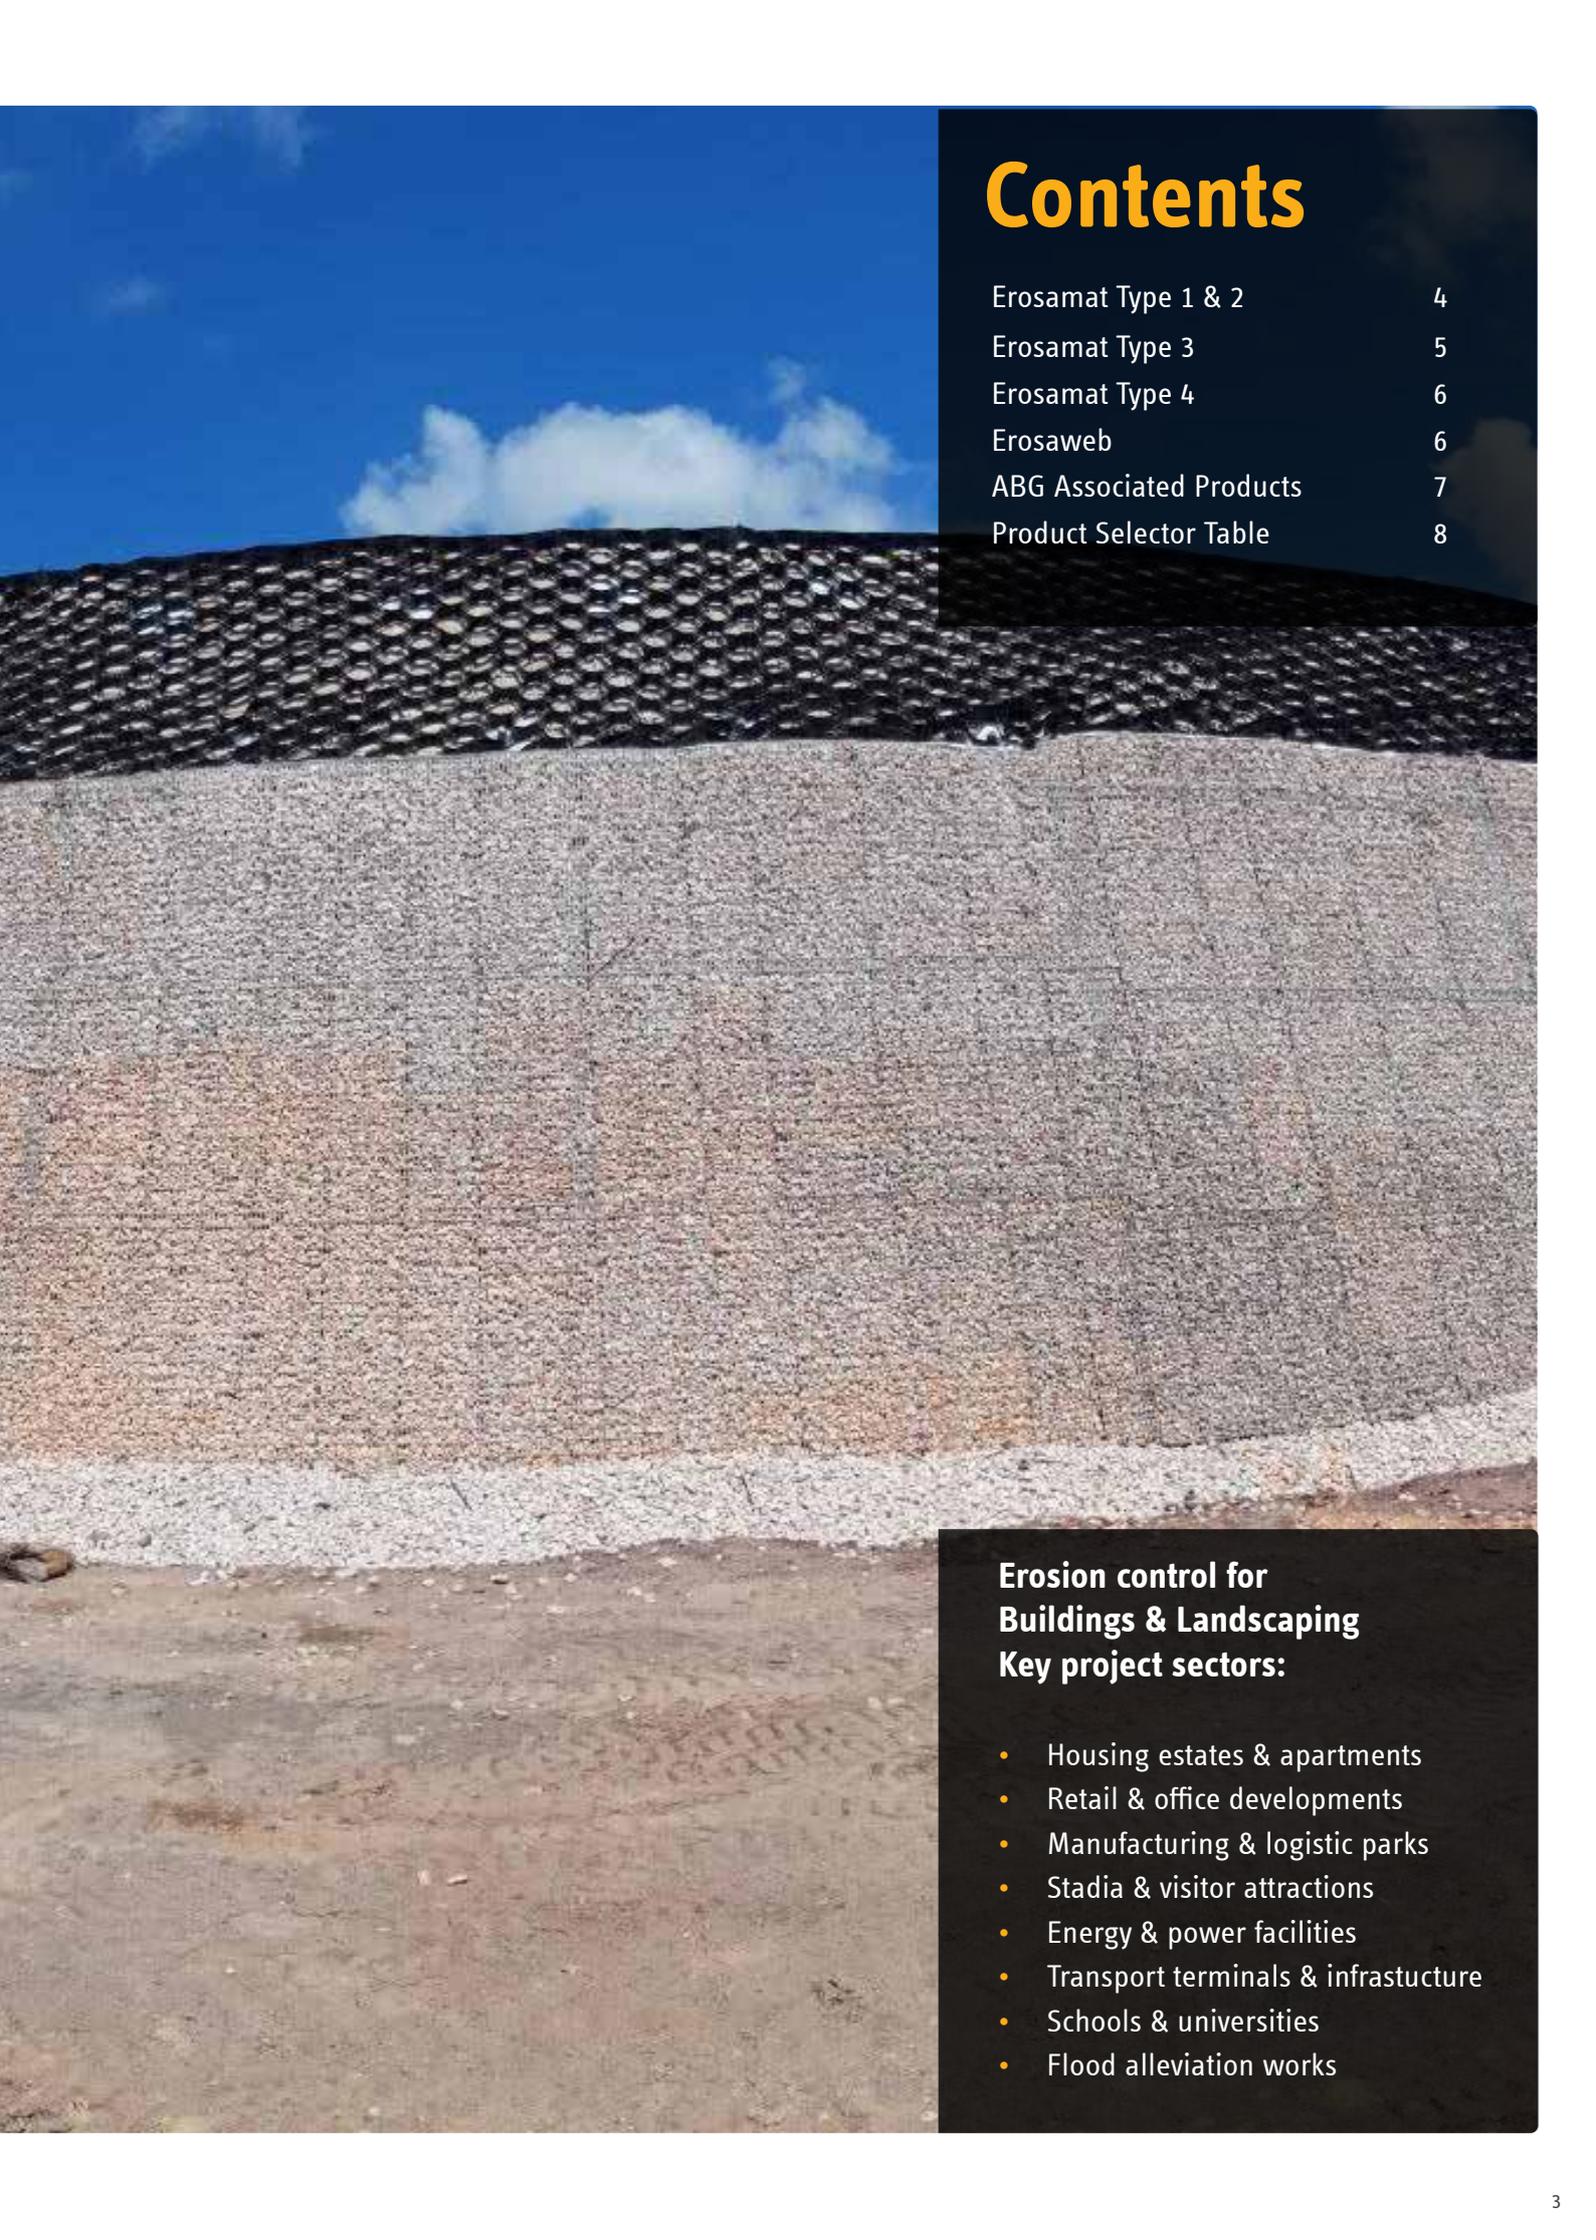

# Contents


Erosamat Type 1 & 2	4
Erosamat Type 3	5
Erosamat Type 4	6
Erosaweb	6
ABG Associated Products	7
Product Selector Table	8

## Erosion control for Buildings & Landscaping Key project sectors:

- Housing estates & apartments
- Retail & office developments
- Manufacturing & logistic parks
- Stadia & visitor attractions
- Energy & power facilities
- Transport terminals & infrastructure
- Schools & universities
- Flood alleviation works

# Erosamat Type 1

Biodegradable Jute erosion control mats for short-term protection

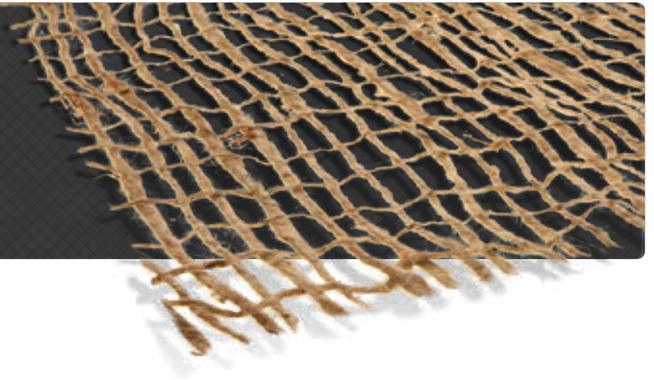

Erosamat Type 1 offers two low-cost biodegradable mats made from woven jute. They are an economic and environmentally friendly erosion control material for use on surfaces that have the ability to support growth in a relatively short period of time.

Erosamat Type 1 consists of a dense mesh of jute fibres that absorb the impact of rain and reduce run-off velocity. The mat protects the soil until the seeds have germinated and a root system is established. Thereafter the Erosamat slowly biodegrades releasing nutrients and improving soil quality.

During installation, seed is placed on to the surface of the soil before the mat is overlaid. In some installations, seeding may take place after installation through a hydroseeding process.

## EROSAMAT TYPE 1 IS AVAILABLE IN TWO GRADES:

### Type 1

An open weave of thick jute yarn with a mass of 500g/m<sup>2</sup> in 1.22m wide bales.

### Type 1a

A dense weave of fine jute yarn with a mass of 186g/m<sup>2</sup> and giving an extremely high degree of surface cover at very low cost. Type 1a is available in 4m wide rolls (approx.) for rapid coverage.



Barratt Homes Development, East Ardsley, Leeds  
Erosamat Type 1 for surface erosion control



The Eden Project, Cornwall  
Erosamat Type 1 to support vegetation growth

# Erosamat Type 2

Biodegradable coir erosion control mat for medium-term protection



Erosamat Type 2 is a heavy duty, long life biodegradable coir erosion mat. The mat prevents soil erosion and helps to establish new vegetation on areas of loose soil and in situations of high run-off and flooding.

Erosamat Type 2 is ideal for use where plant development could be slow, such as with late season planting or in poor fertility soil. They are suited to extremes of temperature, enabling them to be used to control erosion in conditions from tundra to desert.

Coir is a 100% biodegradable, natural and sustainable product produced from coconut husk. It is one of nature's strongest fibres and maintains its tensile strength even under water. It is also highly UV resistant.

In manufacturing Erosamat Type 2, only high-quality Anjengo yarn is used. This has a high lignin content which helps the fibres resist mould and rot, making the product suitable for use underwater. Coir biodegrades very slowly over a 3-5 year period providing plenty of time for plants to establish, even on very poor soils.

## EROSAMAT TYPE 2 IS AVAILABLE IN SIX GRADES:

Ranging from 600 to 1400g/m<sup>2</sup>



John Smith's Stadium, Huddersfield Town Football Club  
Erosamat Type 2 for high run off area protection

# Erosamat Type 3

Permanent polymer erosion control mats for lifetime protection

Erosamat Type 3 is for all situations where an element of permanent erosion control is required, or where there is risk of die-back requiring protection while vegetation re-grows.

Erosamat Type 3 consists of a dense matrix of polypropylene fibres, thermally bonded together to create a tough and flexible, long-lasting erosion control mat. The mat is non-corroding, hydrophobic and is both chemically and microbiologically inert.

The system provides the root reinforcement necessary for natural vegetation to resist the extreme effects of wind, rain and water erosion. As the vegetation grows into the mat, the roots become entwined within the Erosamat matrix. This provides the anchorage for the vegetation to resist high shear stress situations (e.g. overflow channels). Work by CIRIA has shown that such turf reinforcement mats (TRM) can double the permitted channel velocity.

Erosamat Type 3 is to be laid directly on to compacted ground that is free from existing vegetation, roots and stones before filling with friable topsoil, from the bottom to the top of the embankment to a depth of 10mm. Alternatively, the bare mat may be hydroseeded, especially on steep slopes. Existing vegetation growth should not inhibit the contact between the ground and the Erosamat.

The excellent surface protection is as a result of the product being manufactured significantly heavier and denser than the industry norm.

Erosamat Type 3 is coloured black for general use but specific colours can be manufactured, including green and brown.



Willerby and Derringham Flood Alleviation Scheme  
Erosamat Type 3/20Z permanent reinforcement for high flow velocities

## EROSAMAT TYPE 3 IS AVAILABLE IN THREE GRADES:

### Erosamat 3/20Z 500

Three dimensional open matrix TRM

### Erosamat 3/20Z 500M

Three dimensional open matrix with integral mesh TRM

### Erosamat 3/20Z G50

Three dimensional, multifilament open matrix with polymer coated reinforcement grid HPTRM



Aller Moor reinforced grass spillway, Somerset Levels  
Erosamat Type 3/20Z permanent reinforcement for flow velocities up to 7 m/s (vegetated)



Erosamat 3/20Z 500



Erosamat 3/20Z 500M



Erosamat 3/20Z G50



Henthorn Road housing development, Clitheroe  
Erosamat Type 3/20Z permanent reinforcement for drainage channel



Henthorn Road housing development, Clitheroe  
Erosamat Type 3/20Z permanent reinforcement for drainage channel

# Erosamat Type 4

Biodegradable composite erosion control mats

Erosamat Type 4K PP consists of 100% coir matting stitched together between two binding layers of photodegradable polymer mesh for immediate surface protection and erosion control until the natural vegetation is established.

Erosamat Type 4 products have applications in the initial protection of water channels, SuDS basins, swales and landscaping schemes subject to surface erosion prior to the establishment of vegetation cover.



Leeds Bradford Airport, SuDS basin  
Erosamat Type 4K for surface erosion control



Leeds Bradford Airport, SuDS basin  
Erosamat Type 4K with vegetation established

# Erosaweb

Three dimensional geocell for top soil/stone retention on steep slopes & revetments

Erosaweb is a three dimensional geocell system developed to retain imported fill, particularly on steep slopes. Once installed it forms a blanket of shallow pockets across the slope face into which fill is placed. Once filled it protects the slope and fill from erosion forces, whilst allowing vegetation to establish for long-term protection.

Erosaweb comprises interconnecting polymer strips that form a honeycomb of pockets which confines and strengthens the infill material. The polymer strips grip the infill material and provide a tensile force, effectively increasing the shear strength and cohesion of the infill material. For revetments, the Erosaweb is filled with crushed stone or alternatively, low slump concrete is poured into the Erosaweb.

When Erosaweb is installed over geomembrane liners typically at the edge of lagoons, it is tied onto a geogrid that is anchored at the crest of the slope.

The strips are manufactured from strong HDPE polymer, designed to offer long term protection through extended life. The strips are securely bonded at the joints, with a strength at least equal to the strip material. The strips are perforated to allow water within the fill to move freely down the slope. The Erosaweb is supplied in zig-zag coils and then expanded to form the full panel size on site.

Erosaweb is available in standard heights of 100, 150 and 200mm (50 and 300mm are available as special orders). The standard panel size is 4m x 6m.

## EROSAWEB IS AVAILABLE IN SIX GRADES:

	<b>GWX 100/300</b>	<b>GWX 100/500</b>	<b>GWX 150/300</b>	<b>GWX 150/500</b>	<b>GWX 200/500</b>	<b>GWX 200/300</b>
Depth	100mm	100mm	150mm	150mm	200mm	200mm
Cell Diameter	300mm	500mm	300mm	500mm	500mm	300mm
Perforated	Yes	Yes	Yes	Yes	Yes	Yes



University of Exeter, East Park student accommodation  
Erosaweb panels for topsoil containment above stone faced soil nail retaining wall



Sullom Voe Gas Terminal, Laggan-Tormore Roadbridge, Shetland Islands  
Erosaweb panels for embankment stability and topsoil containment

# Erosion Control for Buildings

## Application areas

### Swales and channels

Geosynthetics can contribute to the construction of efficient swales and conveyance channels by providing resilient protection from damage caused by erosion. Steep banks on swales can be constructed using geosynthetics, reducing the land take required and releasing valuable space for development.

### SuDS Ponds and basins

Geosynthetics provide a convenient method for the effective lining of SuDS retention ponds and basins. Where suitable, steep banks can be constructed using geosynthetics making land available for development.

### Steep slopes

Erosion control mats and geocellular containment webs to stabilise cut slopes and prevent erosion. ABG Geosynthetics designs for stabilisation and veneer stability enable maximum use of flat land for development on multi-level topography sites.



Gedling Access Road, Nottingham  
Soil containment for 1:2 slope to maximise adjacent flat land for development



Bellway Homes development, Calverton Road, Nottingham  
Erosamat Type 1 for temporary soil cover on cut slope above ABG Webwall retaining wall

# ABG Associated Products



**Permeable paving**

ABG offer a range of components for integrated porous paving systems to effectively manage the safe collection, treatment, management and dispersal of surface water.



**Drainage**

ABG drainage geocomposites offer very high flow capacity and provide a cost effective alternative to traditional stone groundwater drainage solutions.



**Tree Root Protection**

The Abweb TRP system is a no dig solution preventing damage to tree root structures during the installation process and greatly reduces the depth of imported stone required.



**Webwall Retaining Walls**

Webwall is a geosynthetic system designed for the construction of flexible retaining walls. It uses a geocellular mattress which is laid in layers, with each expanded and filled with site won materials in order to form a structure with a vegetated face.

## About ABG

ABG is a market leader in the design, development, manufacture and technical support of high performance geosynthetic systems for use in a wide range of civil engineering, environmental and building projects.

Formed in 1988, based in Meltham, in the heart of the Pennines, ABG have developed an excellent reputation for developing quality products and delivering outstanding service. The ability for rapid product development ensures that the most innovative, up to date and cost effective solution can be found for many engineering problems.

Technical support is provided by our trained and experienced staff, many of whom are Chartered Civil Engineers. This extensive support extends to full design, design validation, feasibility studies, cost advice and advice on meeting regulatory requirements.


Part of this technical support includes developing and driving knowledge within our active markets, including working with both international and local regulatory bodies on developing guidance and best practice in the use of innovative geosynthetics to solve complex engineering issues.

In support of the construction industry's objectives to reduce the carbon footprint of civil engineering activities, ABG has signed up to the UK Civil Engineer's Emergency Climate Change Declaration. As part of this commitment, ABG has appointed leading carbon management consultants Carbon Footprint Ltd to verify the exact carbon emissions for each of the products we manufacture for geotechnical and Sustainable Drainage applications. This enable precise embodied carbon data to be given for a customer's project and supply chain assessments.

To discuss your project specific requirements contact us.

t 01484 852096

e [geo@abgltd.com](mailto:geo@abgltd.com)

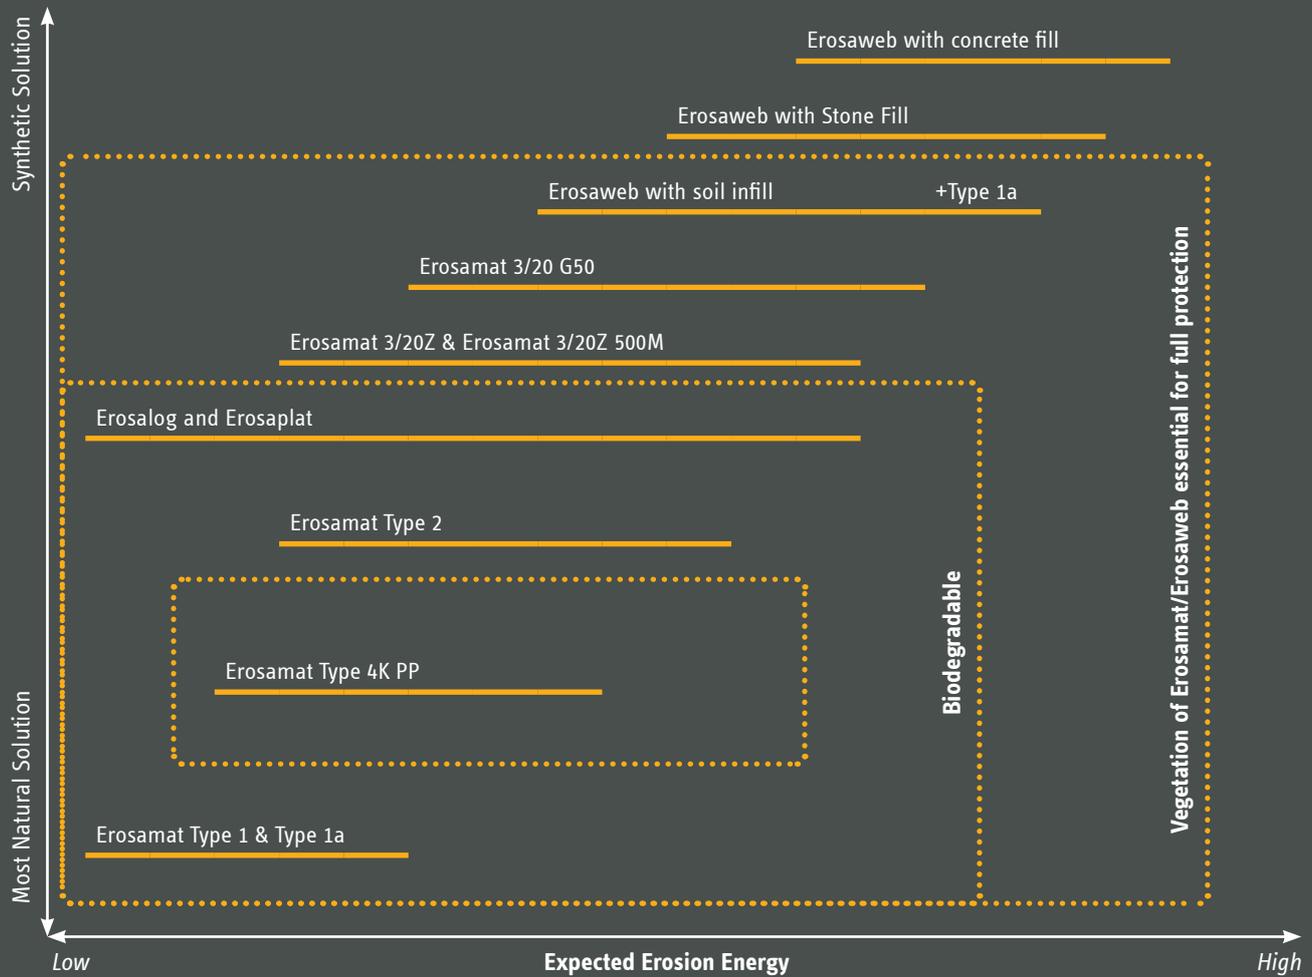

	Material (Note 1)	Max slope angle (Note 2)	Protection grade (Note 3)	Life span (years)	Colour	Suitable submerged	Surface cover
<b>Erosamat Type 1</b>	Jute	45°	Medium	1-3	Brown	No	35%
<b>Erosamat Type 1a</b>	Jute	45°	Medium	1-2	Brown	No	55%
<b>Erosamat Type 2</b>	Coir	65°	High	3-5	Brown	Yes	30-75%
<b>Erosamat Type 3</b>	PP	65°	High	>25	Black*	Yes	75%
<b>Erosamat Type 4K PP</b>	Coir & PP	65°	High	2-5	Brown	Yes	100%
<b>Erosaweb</b>	HDPE	65°	High	>25	Black	Yes	n/a
<b>Erosalog/Erosaplat</b>	Coir	n/a	High	4-10	Brown	Yes	n/a

Note 1 Flat areas may need erosion control

Note 2 In certain situations the mat may be used on steeper slopes, limited only by the ability of the vegetation to obtain moisture for growth. The slope angle for Erosaweb is dependent upon the internal friction angle of the fill intended to be placed into the web

Note 3 Mats and webs may be used in conjunction to offer greater protection

Note 4 Pre-seeded mats are warranted to be free from defects in manufacture. Due to the many variables on any particular site (including soil conditions, weather etc) no warranty can be given that the products will perform under unlimited circumstances. Adequate and timely moisture may not be available to guarantee germination and subsequent seed growth under, on or incorporated in Erosamat materials. Accordingly, no liability can be accepted for any type of damage or loss, direct, indirect or consequential arising from any failure of these products.

Note 5 \*Green and brown available

**abg** | creative  
geosynthetic  
engineering

**abg ltd.** E7 Meltham Mills Rd, Meltham, West Yorkshire, United Kingdom, HD9 4DS  
t 01484 852096 +44 (0)1484 852250 e [geo@abgltd.com](mailto:geo@abgltd.com) [@abg\\_ltd](https://twitter.com/abg_ltd) [www.abgltd.com](http://www.abgltd.com)



This literature together with technical data, specifications, design guidance, technical advice, installation instructions or product samples can be obtained by contacting ABG Ltd. All information supplied in this brochure is supplied in good faith and without charge to enable reasonable assessment of the practical performance of ABG products. Final determination of the suitability of information or material for the use contemplated and the manner of the use is the sole responsibility of the user. As design and installation is beyond the control of ABG (unless specifically requested) no warranty is given or implied and the information does not form part of any contract. ABG reserve the right to update the information within at any time without prior notice. ©2021 ABG Ltd. ABG\_Erosion\_Control\_Brochure